

**CODED NOTES**

- ① SAWCUT EXISTING PANELS TO FULL DEPTH PRIOR TO DEMOLITION. INSTALL NEW CONCRETE PAVEMENT PER DETAIL. DOWEL IN JOINTS 8" O.C.
- ② EXISTING TRENCH DRAIN AND CATCH BASINS ARE TO REMAIN. PROTECT EXISTING STRUCTURES DURING DEMOLITION OF CONCRETE PAVEMENT.
- ③ REMOVE AND REPLACE CONCRETE FLOOR IN GARAGE BAYS. SAW CUT AND REMOVE BROKEN CONCRETE. COMPACT EXISTING AGGREGATE BASE, DOWEL IN JOINTS 6" O.C., SEAL AND PAINT FLOOR. COORDINATE WITH OWNER FOR COLORS. TYPICAL OF 2'X3' AREA.


**SITE NOTES**

THE CONTRACTOR SHALL NOTIFY ALL PROPERTY OWNERS WHEN PROJECT WORK WILL CLOSE ACCESS TO PROPERTY DRIVES AND PARKING AREAS.

SAWCUT ALL EXISTING PAVEMENTS, WALKWAYS, CURBS, ETC. BEFORE REMOVAL. IF DURING CONSTRUCTION, THE CONTRACTOR DAMAGES PAVEMENTS, WALKWAYS, CURBS, ETC. BEYOND THE ORIGINAL SAWCUT, THE CONTRACTOR SHALL REPAIR THE DAMAGED AREA TO NEAT LINES AS DIRECTED BY THE ENGINEER AND/OR THE CITY. THE COST OF THE ORIGINAL SAWCUT SHALL BE INCLUDED IN THE COST BID FOR THE VARIOUS APPROPRIATE ITEMS. THERE WILL BE NO PAYMENT FOR SAWCUTTING NEEDED TO FIX DAMAGED AREAS.

**ESTIMATE OF QUANTITIES**

ITEM	QUANTITY	UNIT	DESCRIPTION
202	127	S.Y.	PAVEMENT REMOVED (BASE BID)
202	292	S.Y.	PAVEMENT REMOVED (BASE BID)
452	127	S.Y.	NON-REINFORCED CONCRETE PAVEMENT (ALT BID)
452	292	S.Y.	NON-REINFORCED CONCRETE PAVEMENT (ALT BID)
SPEC	6	S.F.	INTERIOR CONCRETE FLOOR REPAIR, 10" THICK

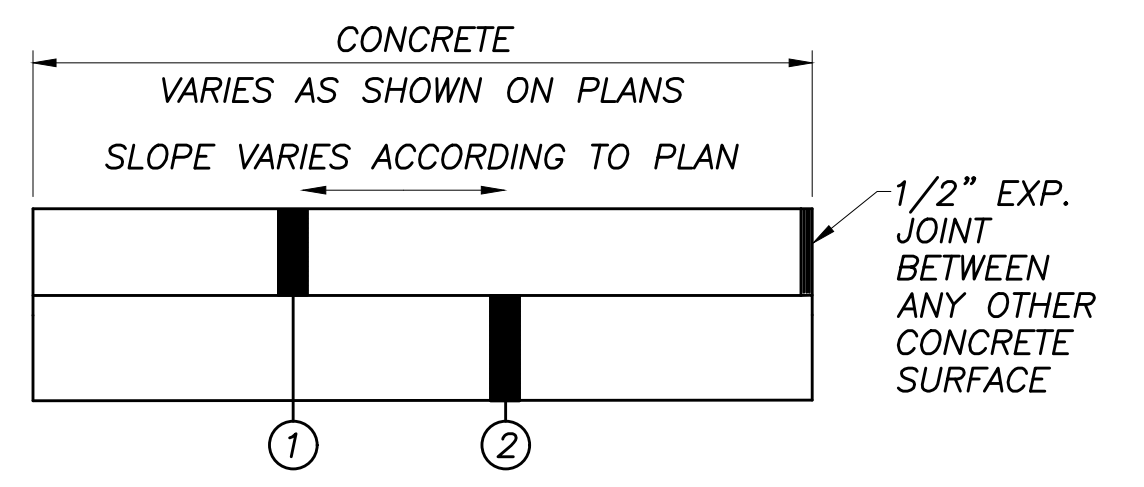

- ① ITEM 452 - 10" NON-REINFORCED CONCRETE PAVEMENT (DOWELED JOINTS)
- ② ITEM 304 - 8" AGGREGATE BASE

**CONCRETE PAVEMENT SECTION**

NO SCALE

NOTE: WORK IS TO BE PHASED/PLANNED TO MAINTAIN USE OF FIRE APPARATUS. COORDINATE WITH OWNER.

**LEGEND**

- PAVEMENT REMOVED/REPLACED - CONCRETE, FULL DEPTH - BASE BID
- PAVEMENT REMOVED/REPLACED - CONCRETE, FULL DEPTH - ALTERNATE BID

#	Date	Change Description

**Station 131 Concrete Repair**  
475 Rocky Fork Blvd.  
Gahanna, Ohio 43230  
for Mifflin Township

**MOODY ENGINEERING**  
300 SPRUCE STREET  
SUITE 200  
COLUMBUS, OHIO 43215  
P: 614 280 8999  
MOODY-ENG.COM

PROGRESS  
DRAWING  
NOT FOR  
CONSTRUCTION

Dwg. Coord.: JDL Tech. Coord.: jan M-E#: 19028

**CONCRETE REPAIR/REPLACEMENT PLAN C101**

BID DOCUMENTS August 14, 2020