




**CODED NOTES**

- ① SAWCUT EXISTING PANELS TO FULL DEPTH PRIOR TO DEMOLITION. INSTALL NEW CONCRETE PAVEMENT PER DETAIL. DOWEL IN JOINTS 8" O.C.
- ② EXISTING TRENCH DRAIN AND CATCH BASINS ARE TO REMAIN. PROTECT EXISTING STRUCTURES DURING DEMOLITION OF CONCRETE PAVEMENT.
- ③ REMOVE AND REPLACE CONCRETE FLOOR IN GARAGE BAYS. SAW CUT AND REMOVE BROKEN CONCRETE. COMPACT EXISTING AGGREGATE BASE, DOWEL IN JOINTS 6" O.C., SEAL AND PAINT FLOOR. COORDINATE WITH OWNER FOR COLORS. TYPICAL OF 2-3'X6' AREAS.
- ④ PROPOSED MONUMENT SIGN (BY OTHERS). PROVIDE POWER FOR LIGHTING FROM ADJACENT LIGHT POLE IN 2" CONDUIT.

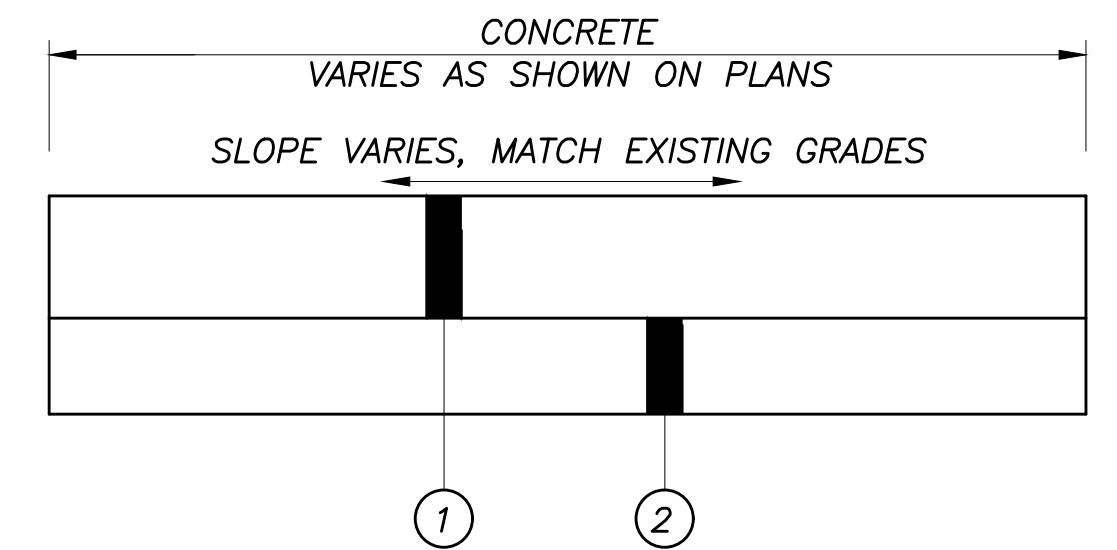

- ① ITEM 452 - 8" NON-REINFORCED CONCRETE PAVEMENT (DOWLED JOINTS)
- ② EXISTING AGGREGATE BASE TO BE REDRESSED AND COMPACTED

\*PROVIDE 10" THICKENED EDGE AT OUTER 4 FEET OF SLAB

**CONCRETE PAVEMENT SECTION**  
NO SCALE


| ESTIMATE OF QUANTITIES |          |      |   |
|------------------------|----------|------|---|
| ITEM                   | QUANTITY | UNIT | DESCRIPTION                               |
| 202                    | 1082     | S.Y. | PAVEMENT REMOVED                          |
| 452                    | 1082     | S.Y. | NON-REINFORCED CONCRETE PAVEMENT          |
| SPEC                   | 4        | S.Y. | INTERIOR CONCRETE FLOOR REPAIR, 10" THICK |

NOTE: WORK IS TO BE PHASED TO MAINTAIN USE OF FIRE APPARATUS. COORDINATE WITH OWNER.

**LEGEND**

CONCRETE PANELS TO BE REMOVED AND REPLACED PER DETAIL. MATCH EXISTING CONTROL JOINTS.

INTERIOR CONCRETE FLOOR TO BE REMOVED AND REPLACED. SEAL AND PAINT CONCRETE TO MATCH EX.

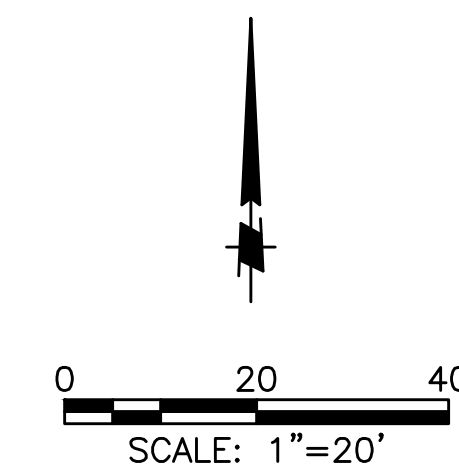

| # | Date | Change Description |
|---|------|--------------------|
|   |      |                    |
|   |      |                    |
|   |      |                    |

**Station 134 Concrete Repair**  
422 McCutcheon Road  
Gahanna, Ohio 43230  
for  
Mifflin Township

**MOODY ENGINEERING**  
300 SPRUCE STREET  
SUITE 200  
COLUMBUS, OHIO 43215  
P: 614 280 8999  
MOODY-ENG.COM

PROGRESS  
DRAWING  
NOT FOR  
CONSTRUCTION

Dwg. Coord.: JDL Tech. Coord.: M-E#: 19029

**SITE PLAN** **C101**

DESIGN DEVELOPMENT October 1, 2019